

**CITY OF NAPLES
PURCHASING DIVISION
CITY HALL, 735 8TH STREET SOUTH
NAPLES, FLORIDA 34102
PH: 239-213-7100 FX: 239-213-7105**

ADDENDUM NUMBER 1

NOTIFICATION DATE:	BID TITLE:	BID NUMBER:	BID OPENING DATE & TIME:
4/04/12	City of Naples – Sidewalk Installation River Park	033/12	04/16/12 2:00PM

**THE FOLLOWING INFORMATION IS HEREBY INCORPORATED INTO,
AND MADE AN OFFICIAL PART OF THE ABOVE REFERENCED BID.**

BID OPENING DATE CHANGE: APRIL 16, 2012 AT 2:00 PM

RESPONSES TO QUESTIONS:

1. In review of the plans there is no detail of the construction of the retaining wall can the City provide a detail?

Attached

2. Clearing and Grubbing quantities provided are in lineal feet by what width is the area. The area to clear and grub do not match for the sidewalk and sod installation.

This has been changed to a lump sum item. An updated sheet of the quantities is attached.

3. As per note 2 on the Grading Plan. Can all the material excavated be placed along 12th street?

Yes, with placement subject to direction of engineer provided that the material is acceptable.

4. Is the optional base is to be installed through out the entire sidewalk as a new sub-base?

The 4" concrete sidewalk we'll require a compacted sub-base ...

.The 6 " sidewalk is to be Class I with Fibermesh, and the sub-base is required as 4" limerock

5. Are permit fee's to be included in bid or the City of Naples will waive permit fee's? If permit fee's to be included in bid what are the estimated value?

Permitting exempt per Code.

IMPORTANT MESSAGE

PLEASE ACKNOWLEDGE RECEIPT OF THIS ADDENDUM ON THE BID COVER SHEET.

6. Will the City of Naples require signed and sealed final survey plans?

No

7. Is a workman's comp exempt certificate acceptable?

Yes, as long as it is issued by the State and there is recognition that all subcontractors must be covered for worker's compensation.


8. Will the excess material be going to 12th St North ROW that is adjacent to this project?

Disposal of the excavated material shall be by placement along the west side of the unimproved portion of the 12th Street corridor extending southerly from the City's sewer pump station an approximate distance of 150 feet, more or less, with a nominal width between 10'-15', a height of up to 12" above existing grade and subject to direction of the Project Engineer.

IMPORTANT MESSAGE

PLEASE ACKNOWLEDGE RECEIPT OF THIS ADDENDUM ON THE BID COVER SHEET.


HEIGHT: 1.65 FT
LENGTH: 35 FT
WIDTH: 2 FT

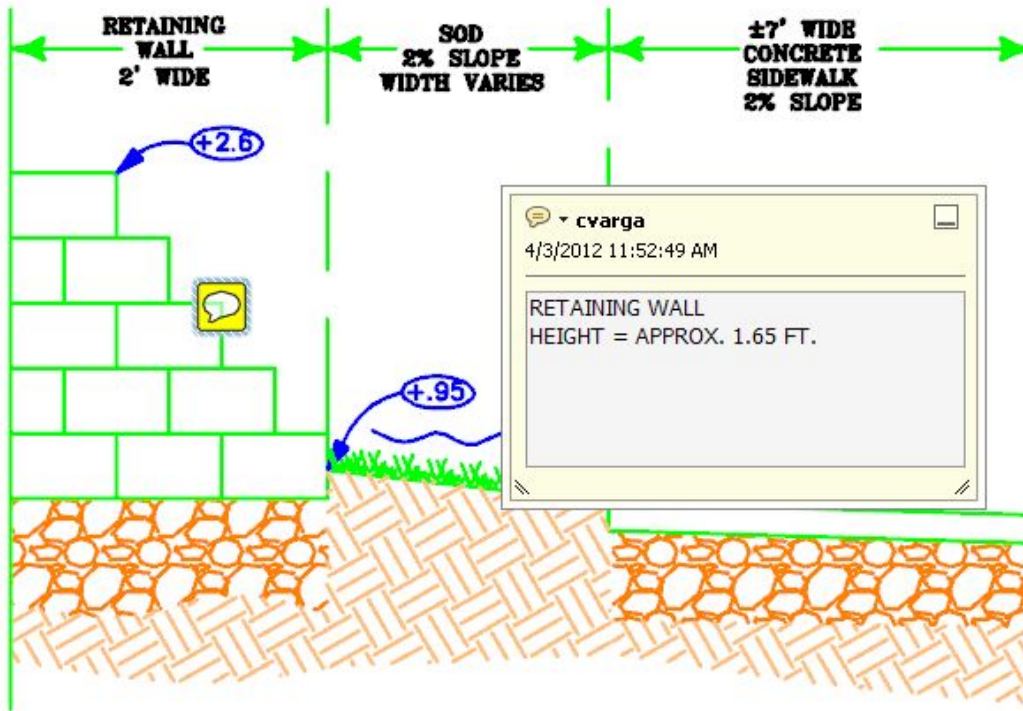


**CROSS-SECTION
B-B**

IMPORTANT MESSAGE


PLEASE ACKNOWLEDGE RECEIPT OF THIS ADDENDUM ON THE BID COVER SHEET.



City of Naples
THIRD AVENUE NORTH SIDEWALK
EXISTING CONDITIONS PLAN

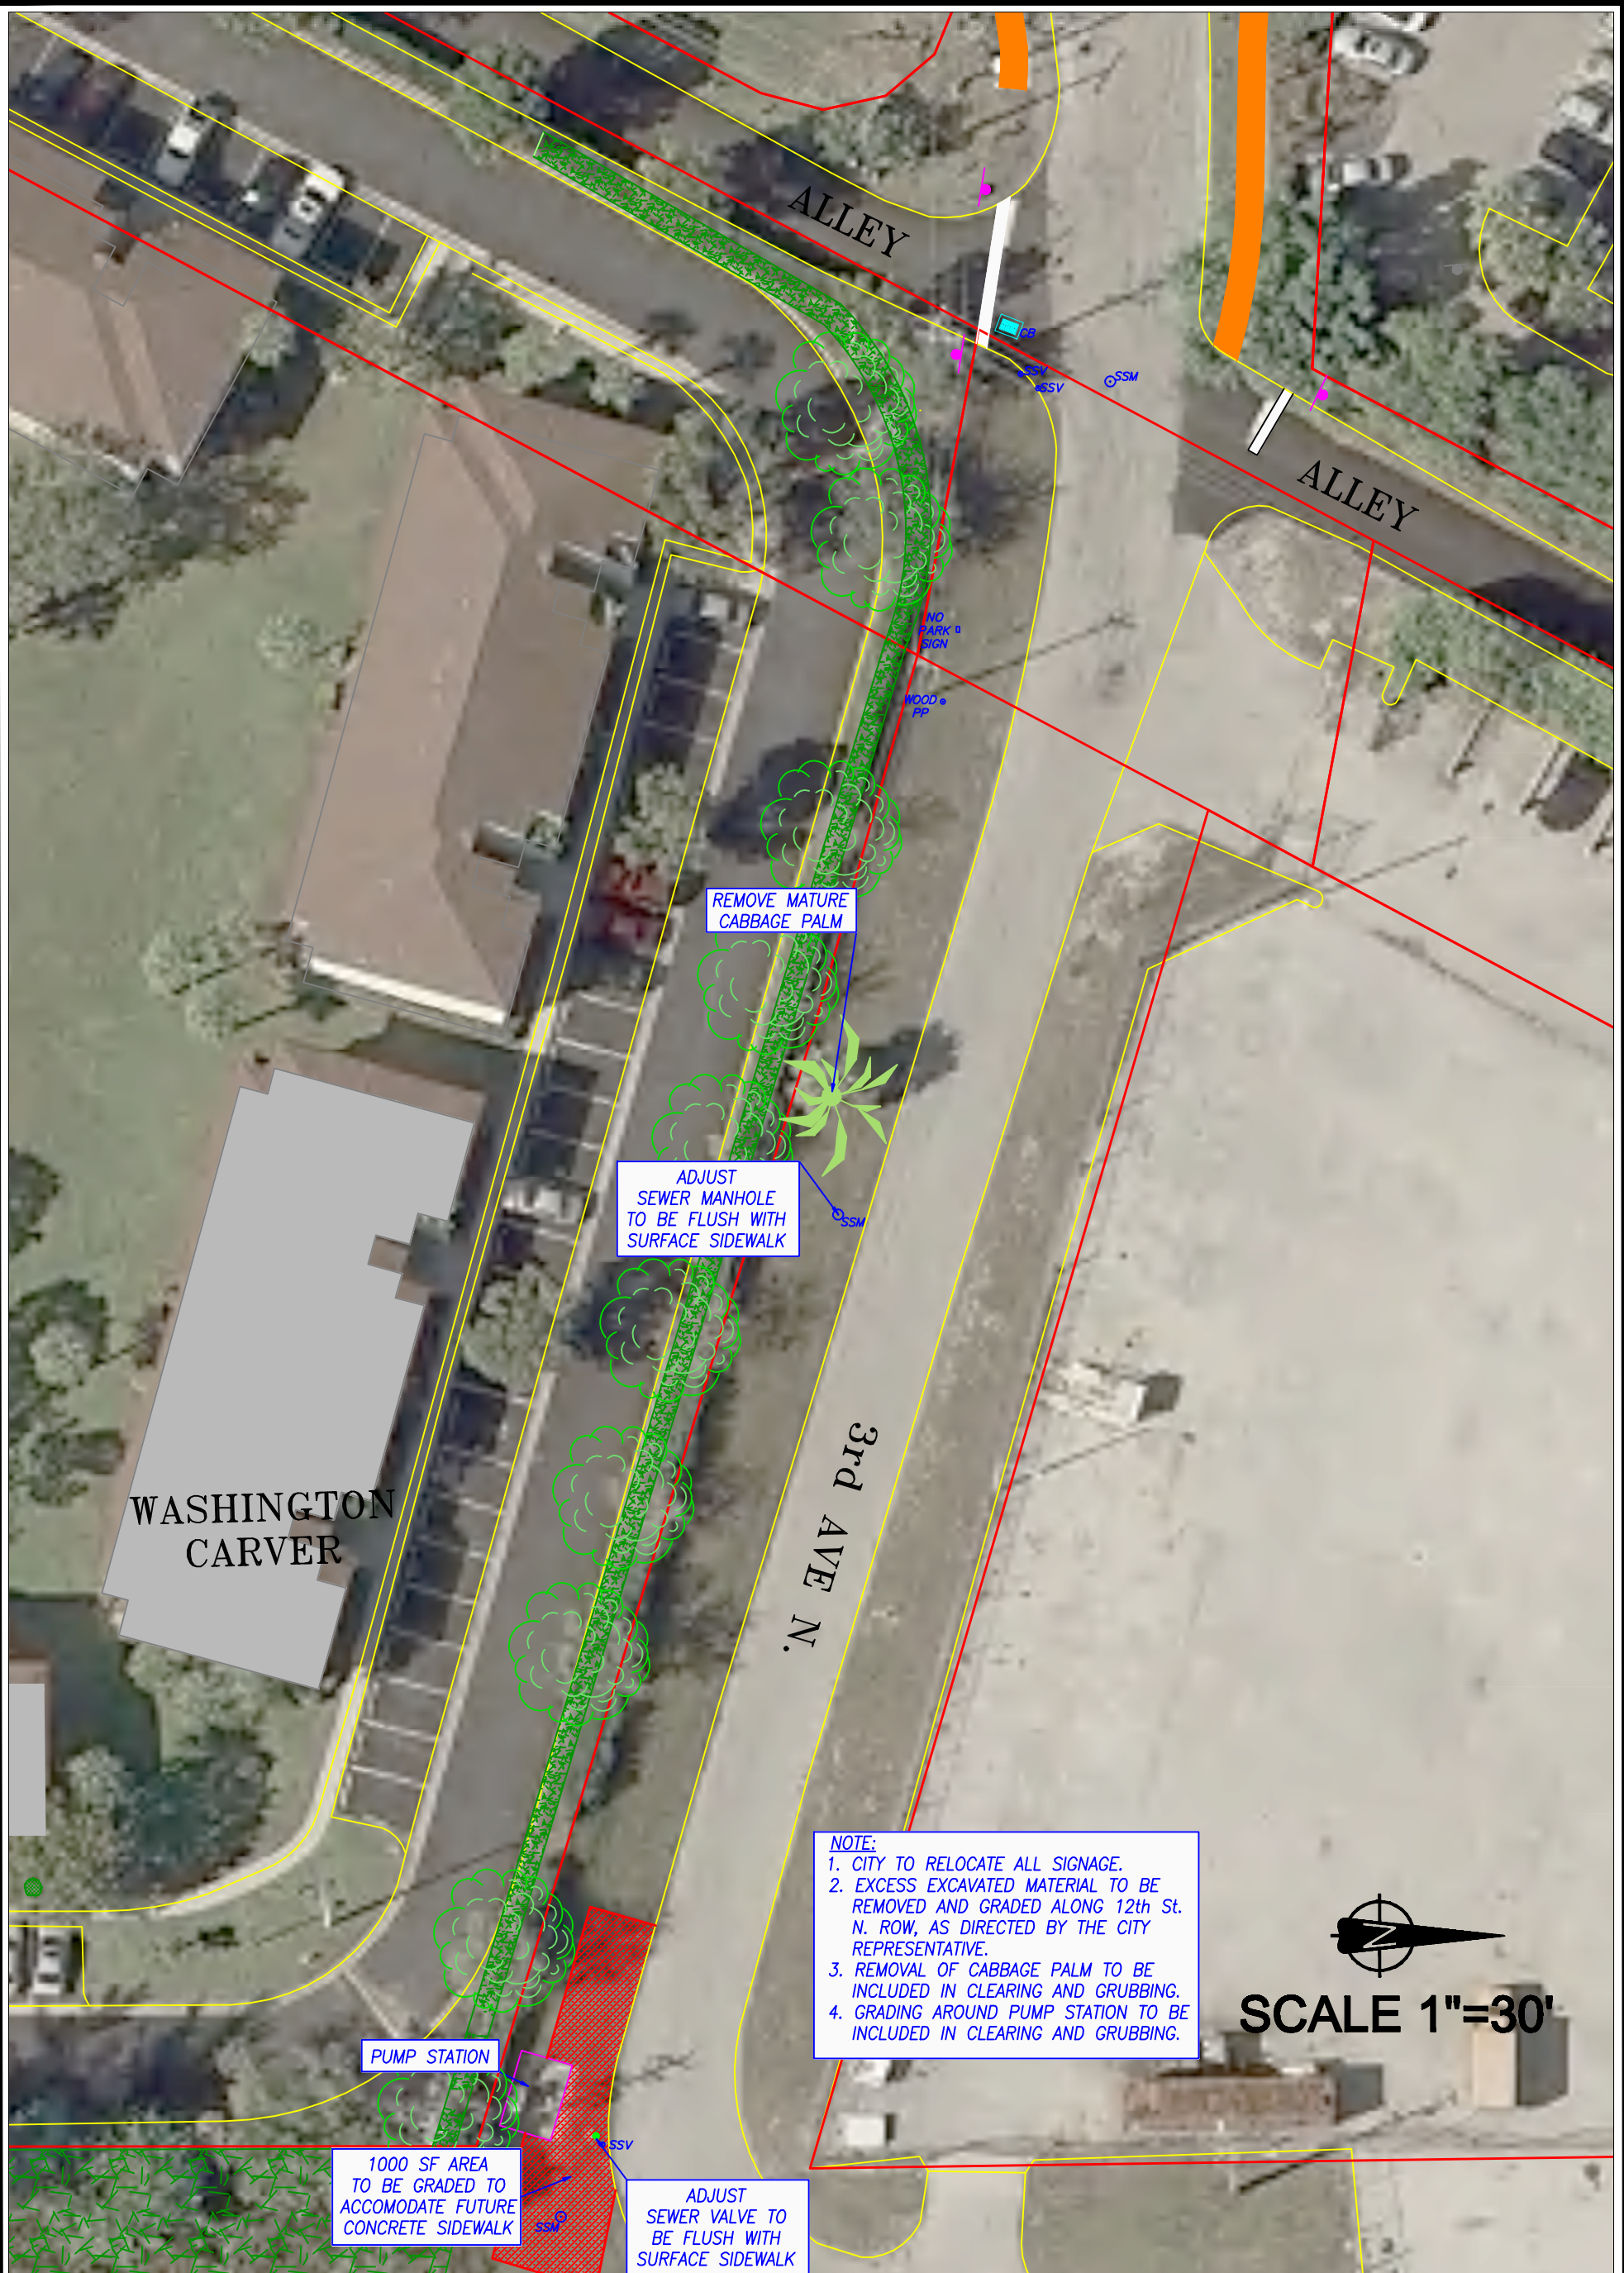


- NOTE:**
1. CITY TO RELOCATE ALL SIGNAGE.
 2. EXCESS EXCAVATED MATERIAL TO BE REMOVED AND GRADED ALONG 12th St. N. ROW, AS DIRECTED BY THE CITY REPRESENTATIVE.
 3. REMOVAL OF CABBAGE PALM TO BE INCLUDED IN CLEARING AND GRUBBING.
 4. GRADING AROUND PUMP STATION TO BE INCLUDED IN CLEARING AND GRUBBING.


SCALE 1"=30'



City of Naples

THIRD AVENUE NORTH SIDEWALK GRADING PLAN

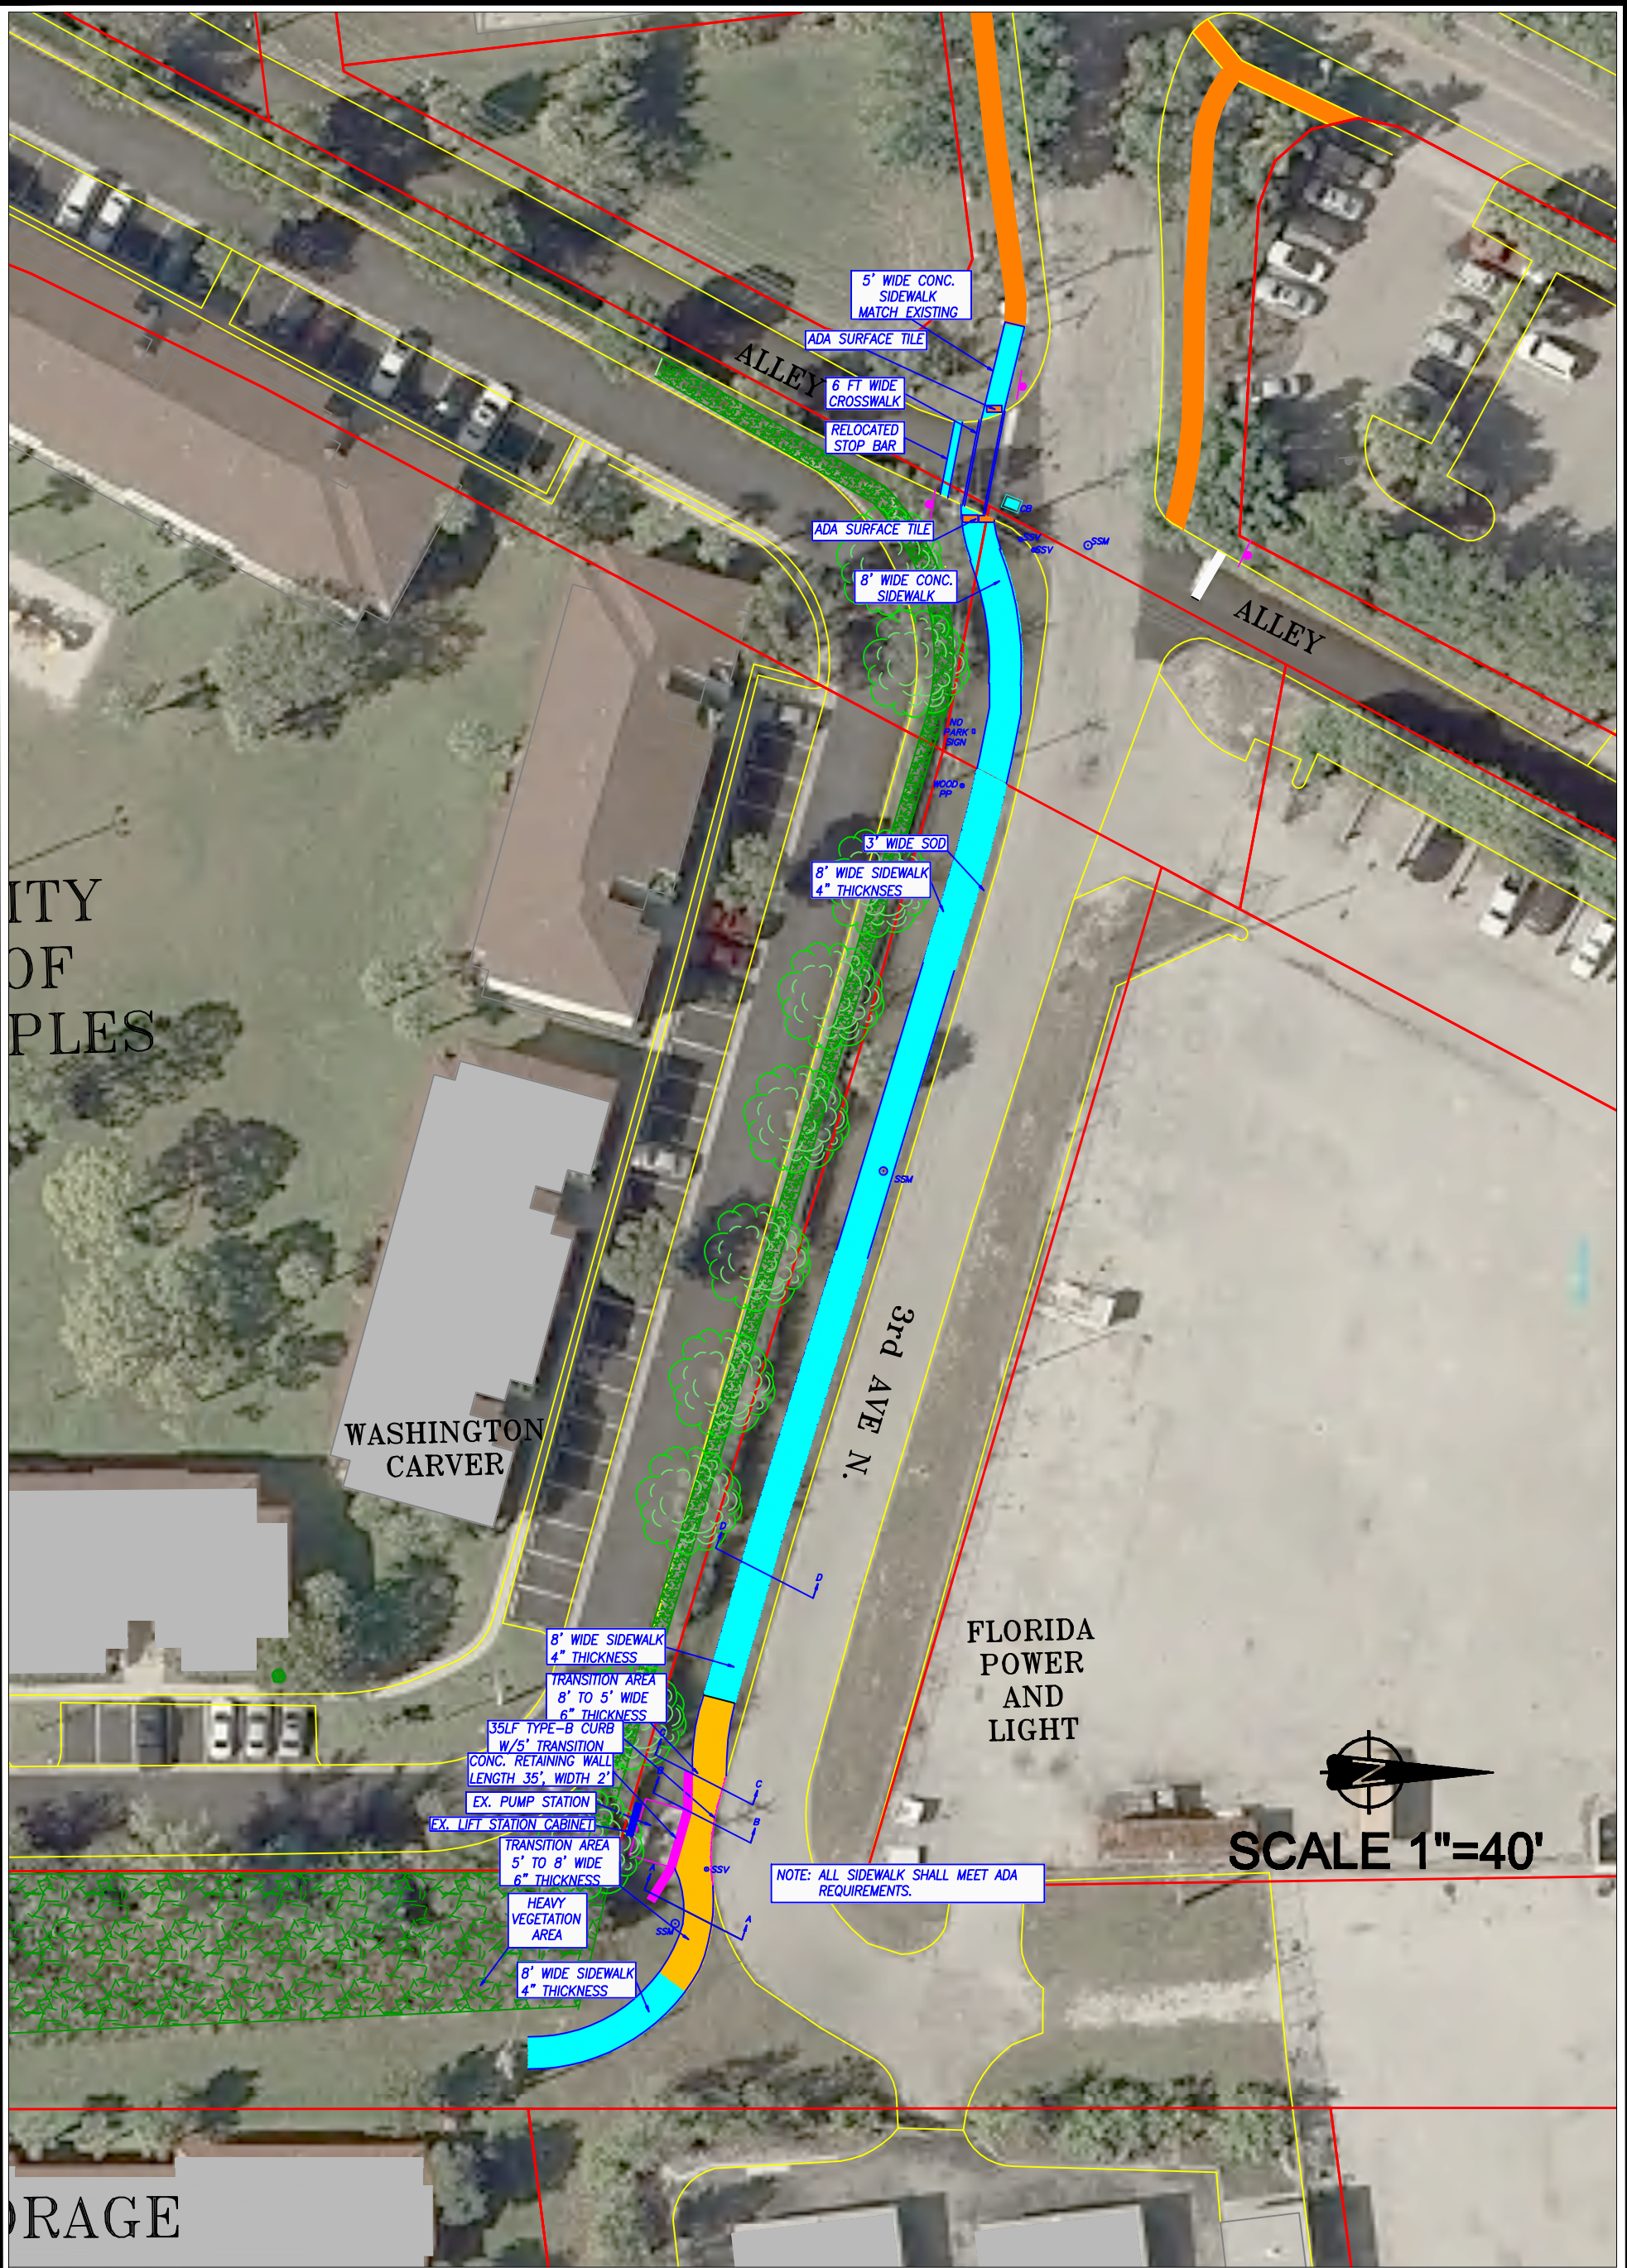

CITY OF NAPLES


ORAGE




City of Naples

THIRD AVENUE NORTH SIDEWALK CONCEPTUAL PLAN

CROSS-SECTION
A-A

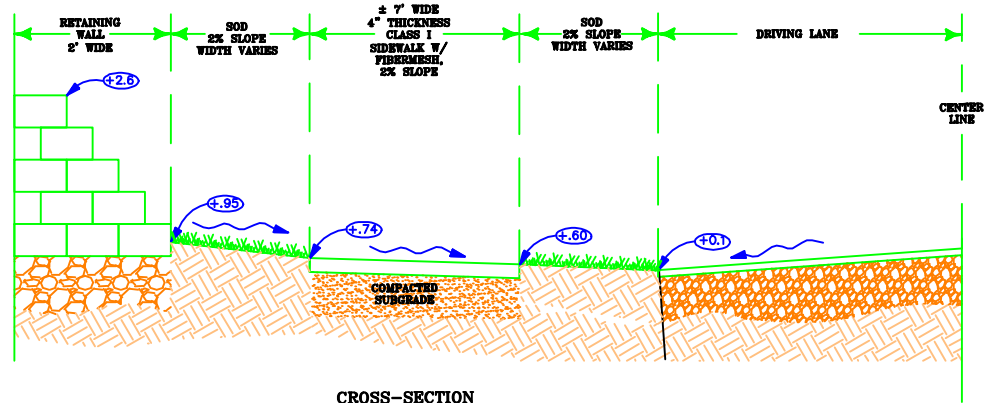


CROSS-SECTION
B-B

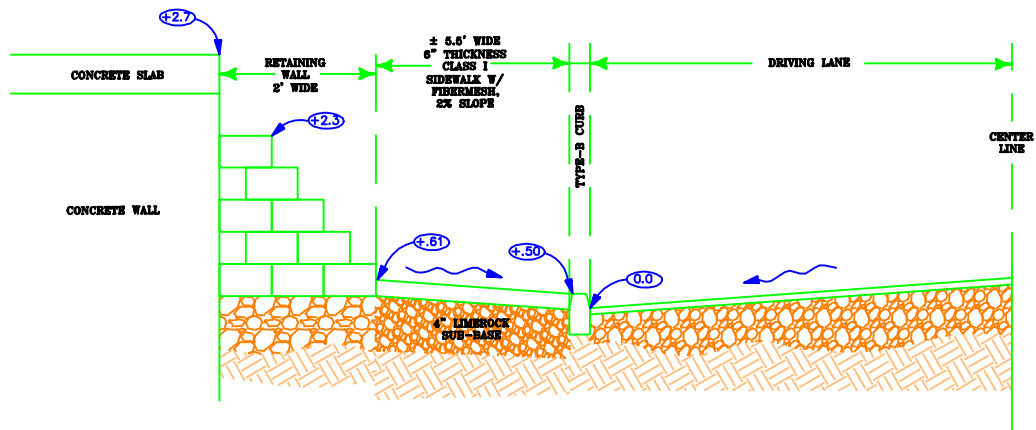


CROSS-SECTION
C-C

NOT TO SCALE

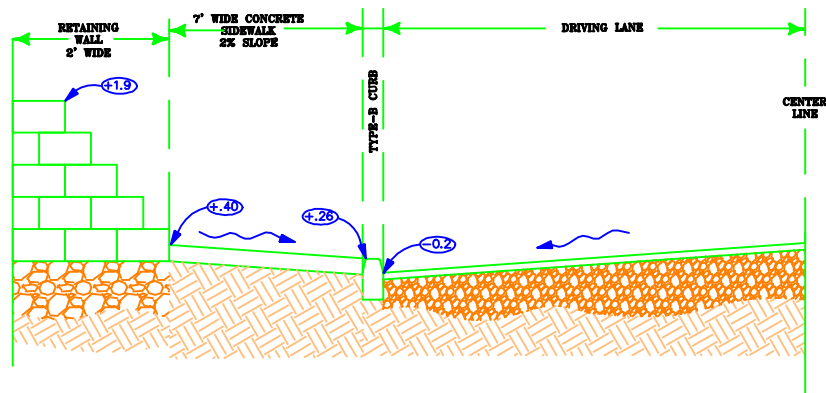


CROSS-SECTION
D-D
TYPICAL

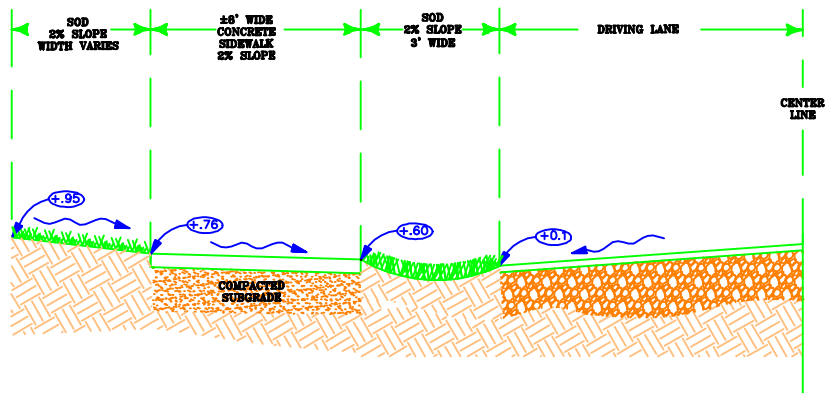

Item Description

BASE BID ITEMS

Item Description	QT	UNIT
1 Mobilization/Demolition	<FDDT Pay-Item No. 101-1>	1 LS
2 Maintenance of Traffic	<FDDT Pay-Item No. 102-1>	1 LS
3 Work Zone Signs	<FDDT Pay-Item No. 102-60>	1 LS
4 Barricades (Temporary), (Types I,II)	<FDDT Pay-Item No. 102-74>	1 LS
5 Clearing and Grubbing (Includes Grading)	<FDDT Pay-Item No. 110-1-1>	1 LS
6 Optional Base	<FDDT Pay-Item No. 285-701>	1 LS
7 Curb & Gutter (Type B), Install	<FDDT Pay-Item No. 520-1-10>	35 LF
8 Concrete Sidewalk (4" Thick)	<FDDT Pay-Item No. 522-1>	325 SY
9 Concrete Sidewalk (6" Thick)	<FDDT Pay-Item No. 522-2>	65 SY
10 Detectible Warning On Walking Surface (Purchase & Install)	<FDDT Pay-Item No. 527-1>	2 EA
11 Solid Traffic Stripe (24" White) (Paint)	<FDDT Pay-Item No. 710-11-115>	18 LF
12 Solid Traffic Stripe (12" White) (Paint) CROSSWALK	<FDDT Pay-Item No. 710-11-211>	50 LF
13 Concrete Retaining Wall (2' x 3' x 35')	<FDDT Pay-Item No. 521-72>	1 LS
14 Adjust Sewer Valve/Manhole		2 LS
15 Bahia Sod		3200 SF
16 Initial Contingency Amount (Do Not Bid)	<FDDT Pay-Item No. 999-25>	1 LS



City of Naples

THIRD AVENUE NORTH SIDEWALK CROSSSECTION AND QUANTITIES