Attachment B - Drawing -1
20-002 NPD Interior Renovations FWQ

20-002 - NPD Interior Renovations FWQ

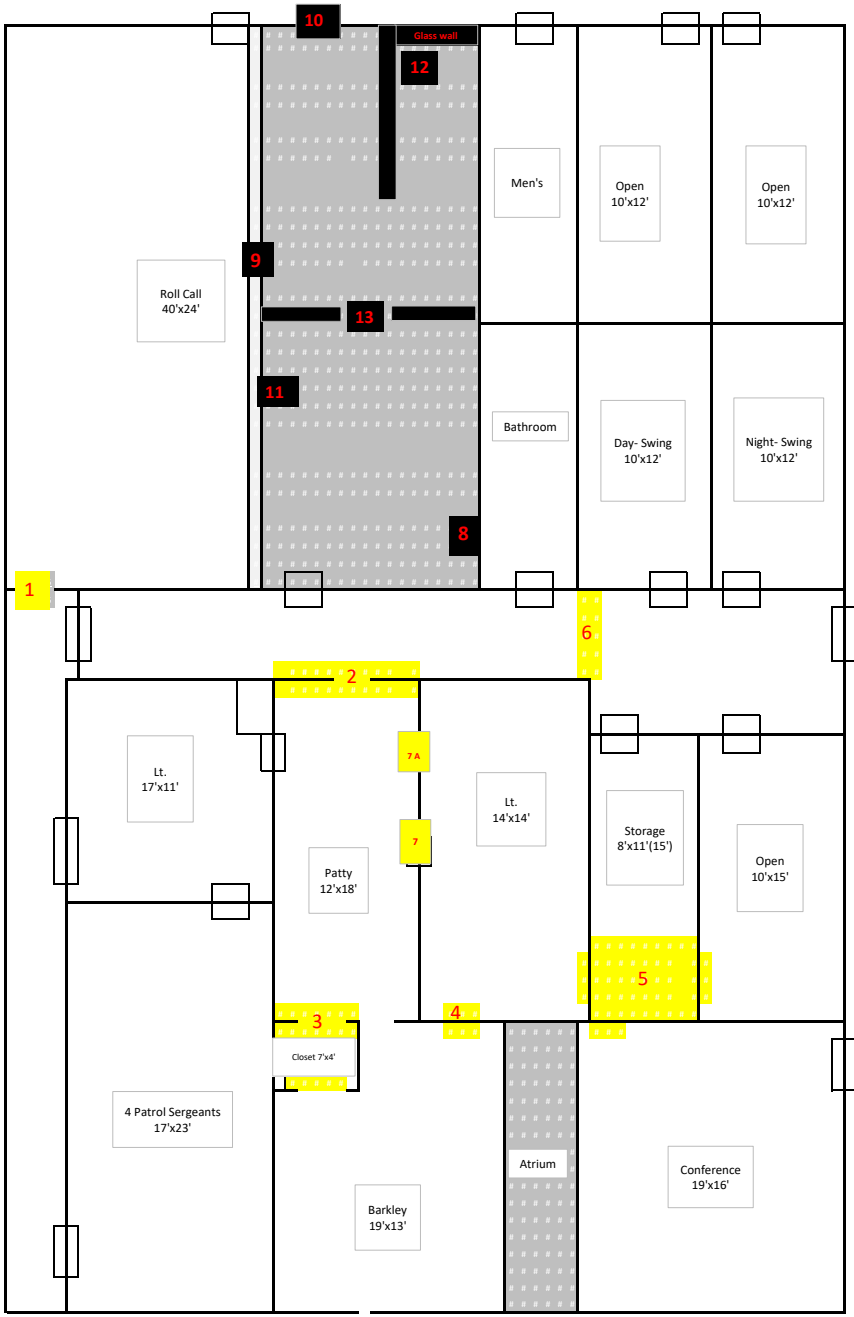

PHASE 1/ # 1-7

1. Frame in new door opening. Install door with new window (Supplied by City) from Phase 2 item # 11. Finish drywall and ceiling to match existing.

2. Make existing door opening larger to accommodate new door. (Supplied by City). Door dimensions is 92" x 103 3/4 with side lights. Rework electrical as needed.

3. Remove door/jam and cabinets. Existing opening to be closed in with framing and drywall. Demoed door and frame to be transferred to adjacent side. Finish drywall and ceiling to match existing. Rework electrical as needed.

4. Remove existing door and frame. Finish drywall and ceiling to match existing.

5. Remove 3 doors 4 and frames. Finish openings to match existing. Demo all interior walls, creating one room (labeled Storage). Finish drywall and ceiling to match existing.

6. Remove existing door and frame. Finish drywall and ceiling to match existing.

7. Move door to align with adjacent door. (7A) is new door opening.

PHASE 2/ # 7-13

8. Frame in walls and door opening to create new closet. Used demoed closet door from phase 1 item # 5. Add light fixture and switch for new closet. Finish drywall and ceiling to match existing.

9. Remove existing wall, creating one large room. (Rework electrical and drop ceiling as needed)

10. Frame/drywall and finish new wall where existing opening is, and glass wall was removed.

11. Frame/drywall and finish around drain pipe.

12. Remove glass wall. Rework drop ceiling as needed.

13. Remove door and reinstall with new glass window. (see item #1 Phase 1)

NOTES:

Mobilization/ Contractor shall provide dumpster with site cleanup daily.
Contractor shall protect all surrounding area from dust and debris.
All contractors will need to background checked and properly badged for access in and out of the building.
Contractor shall provide a Supervisor, labor, materials and equipment.
Work needs to be done between 7:00am-4:00pm M-F. Weekends by Project Managers approval only.
All work to be completed 3 weeks from NTP.