




Seagate Linear Park Boardwalk Restoration

Seagate Linear Park Is Located At 5204 Seagate Dr. Naples, 34103.

The Project Consists Of The Restoration Of 2 Wood Boardwalks






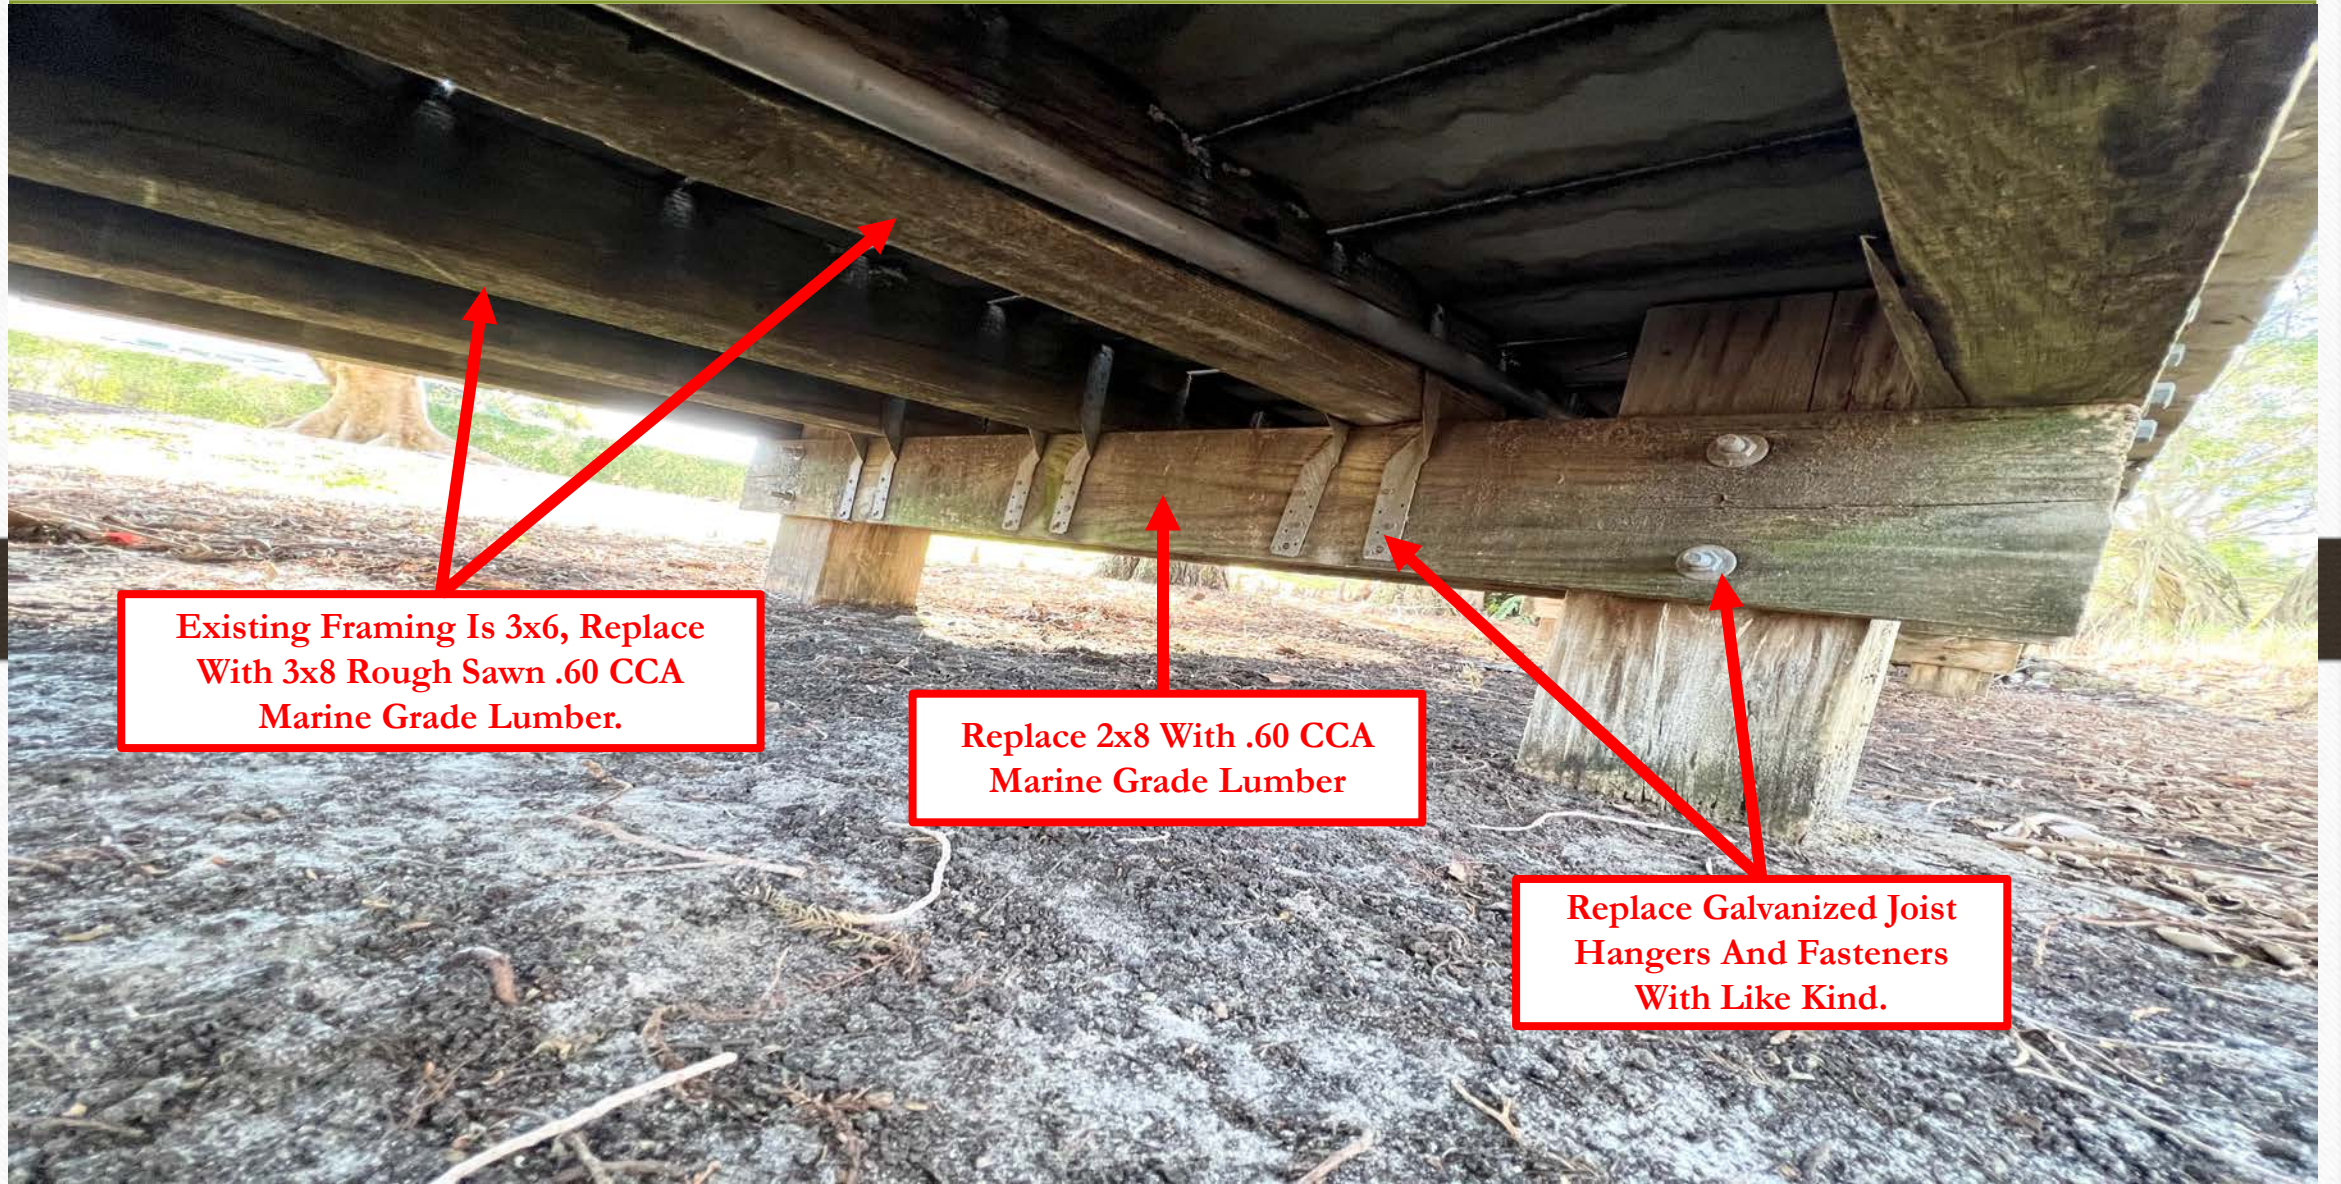

Existing Framing Is 3x6, Replace With 3x8 Rough Sawn .60 CCA Marine Grade Lumber.

Replace 2x8 With .60 CCA Marine Grade Lumber

Replace Galvanized Joist Hangers And Fasteners With Like Kind.

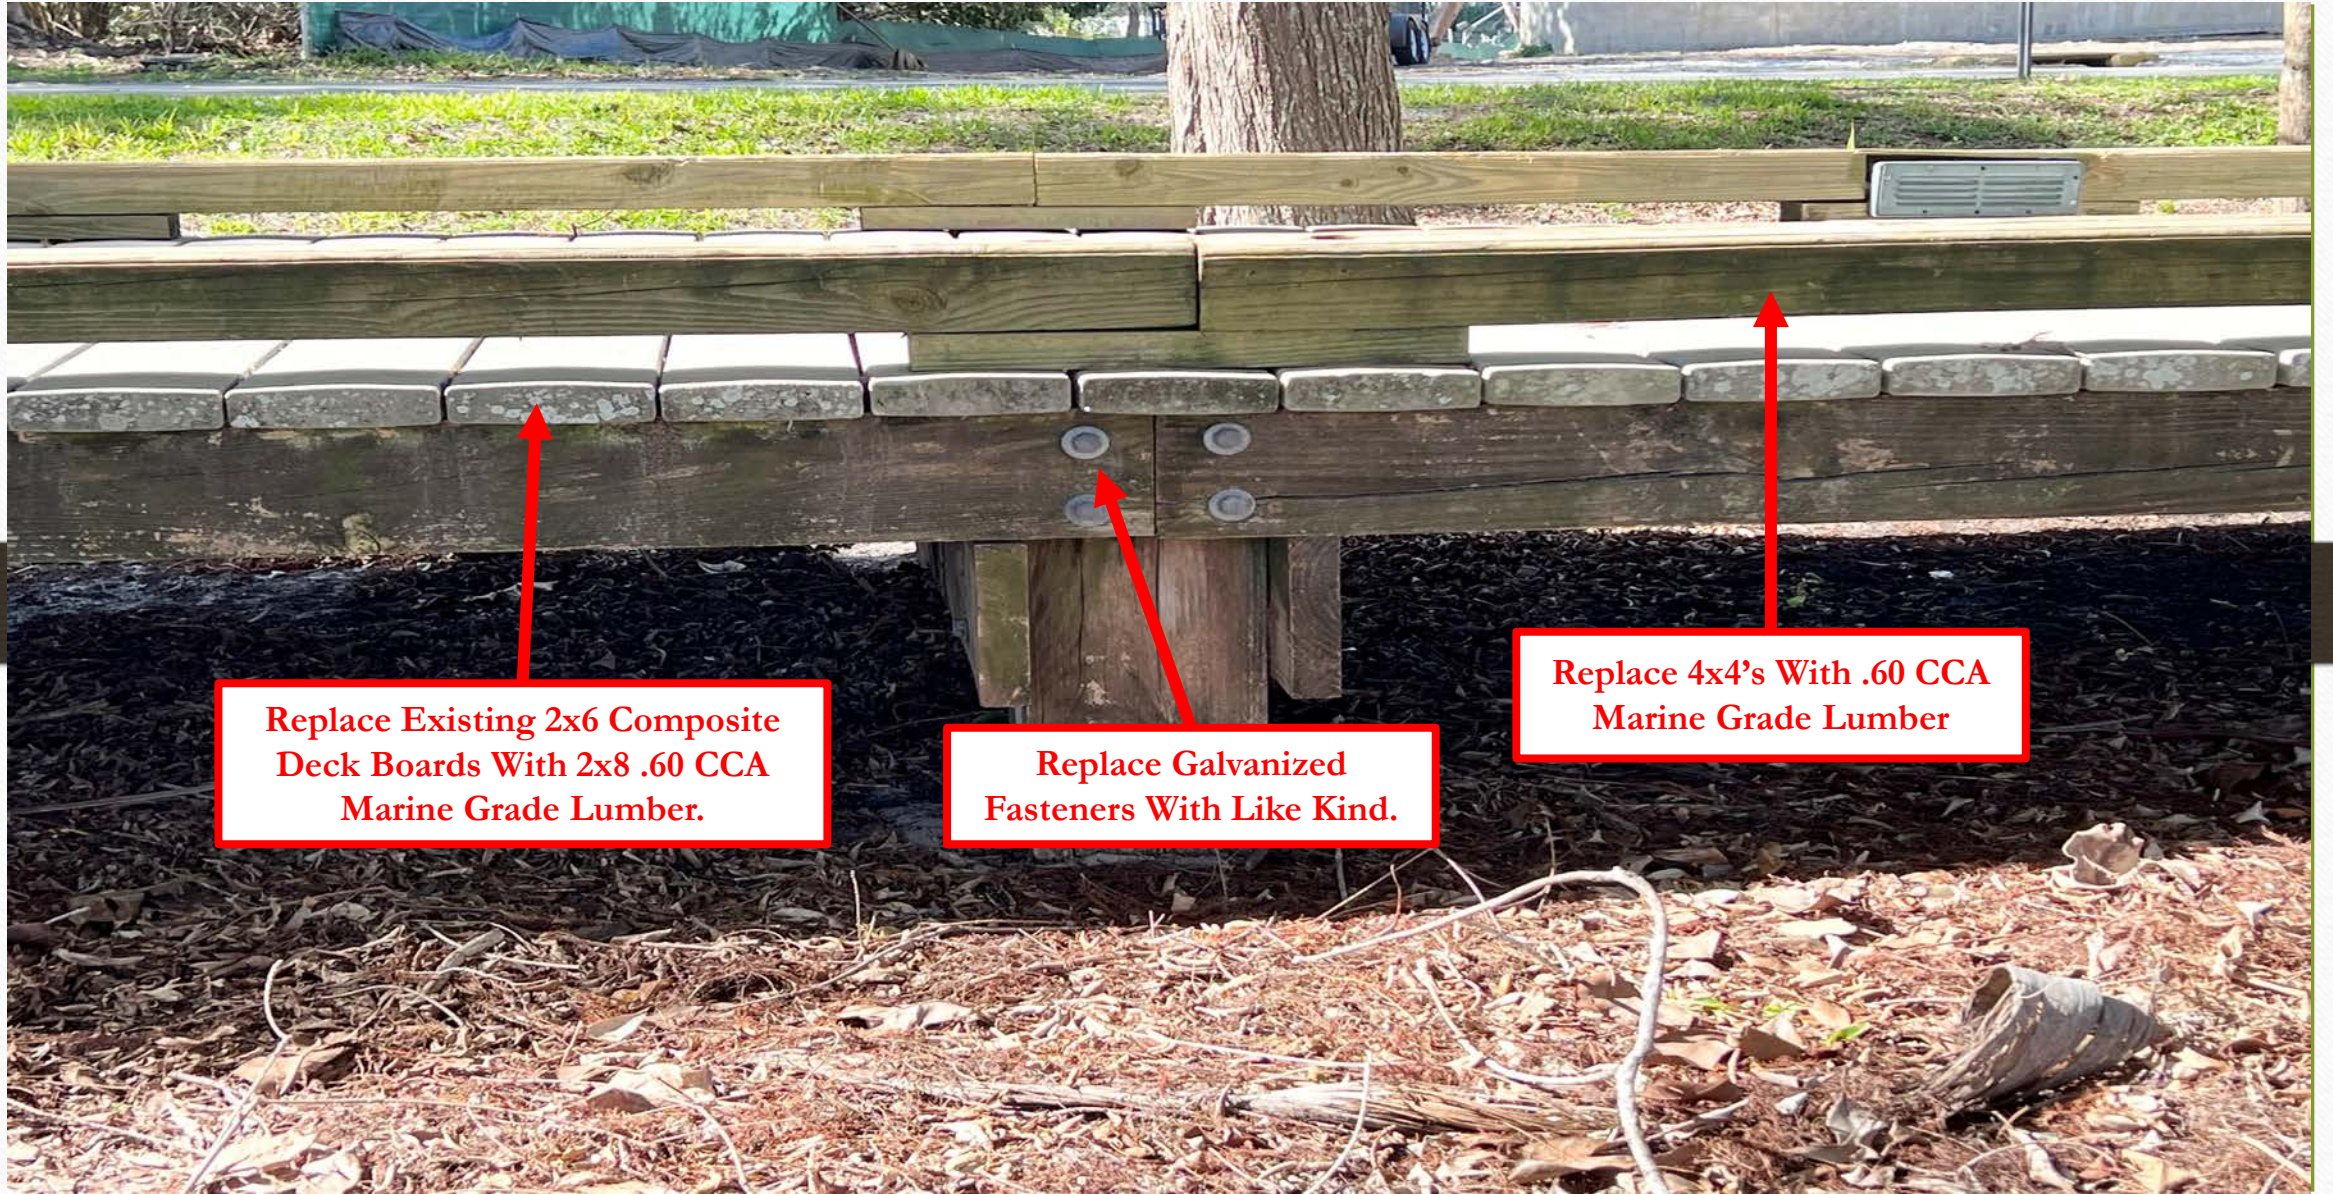

Replace Existing 2x6 Composite Deck Boards With 2x8 .60 CCA Marine Grade Lumber.


Replace Galvanized Fasteners With Like Kind.

Replace 4x4's With .60 CCA Marine Grade Lumber



**Location Of New Lights Remains The Same.
New Fixture Type (TBT)
Lighting Done By Others**

**Electrical Conduit To Be Carefully Removed And
Reinstalled With New Galvanized Straps.**

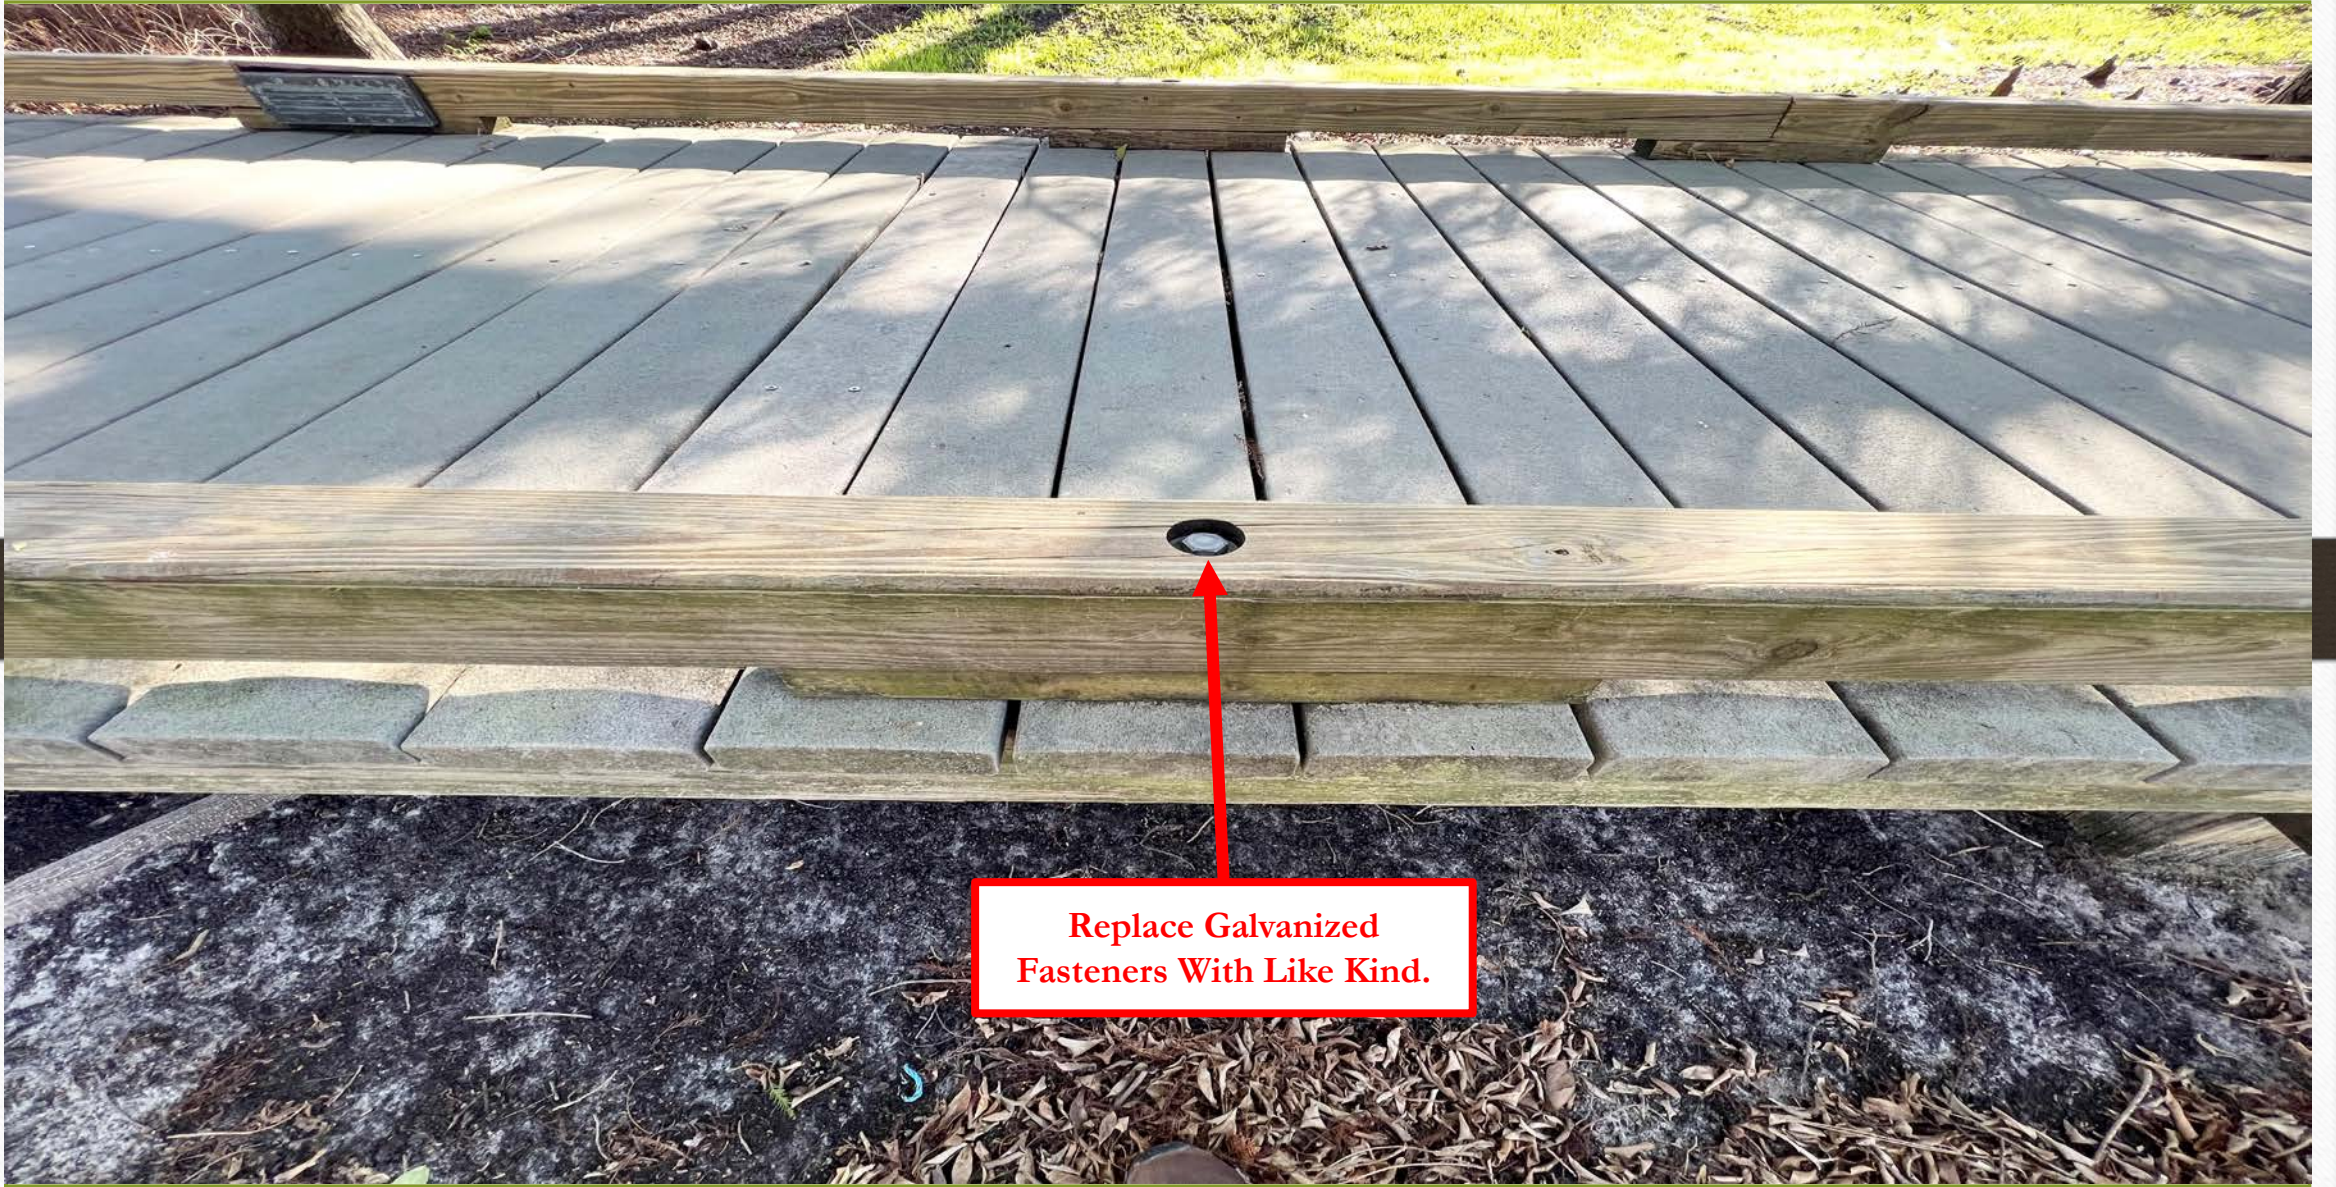

**Replace Galvanized
Fasteners With Like Kind.**

SPECIFICATIONS:

- ***Approx. Dimensions Of South Boardwalk Is 6' Wide X 95' Long***
 - ***Approx. Dimensions Of North Boardwalk Is 6' Wide X 85' Long***
-
- **ALL LUMBER MUST BE #2 MARINE GRADE WITH A .60 CCA RATING OR HIGHER.**
 - **All Galvanized Hardware That Is Removed Must Be Replaced With New To Match Existing.**
 - **All Decking Must Be Fastened With # 8 x 3" Square Head Stainless Screws With A 305 Grade Or Higher.**
 - **All 8x8's To Match Existing. *(Post Span To Match Existing @ 12' O.C)***
 - **All Supporting Beams Must Be 2x8 To Match Existing.**
 - **All 4x4's To Match Existing.**
 - **All Joists Must Be 3x8 Rough Sawn. *(Joists Follow Same Layout As Existing)***
 - **All Decking Must Be 2x8 Installed With 3 Fasteners Per Joist *(15 Total Per Board)***
 - **All Decking Must Be Installed Bark Side Up Unless Cupped Otherwise.**
 - **All Cut Edges Must Be Lightly Sanded To Prevent Slivering.**
 - **All Demoad Material Must Be Disposed Of By Contractor And Jobsite Needs To Be Free Of Debris Daily.**
 - **Once Work Begins The Contractor Is To Be On Site Every Day Until Completion.**